1280mm width 83um thickness 66 meters per roll

Thicker than normal, more adhesive strength

Physical Vapor Deposition of Coatings On Glass, used sputtering target material. The application mainly is Low-E Coating glass (low emissivity coated glass).




1280mm width 83um thickness 66 meters per roll

Thicker than normal, more adhesive strength

Physical Vapor Deposition of Coatings On Glass, used sputtering target material. The application mainly is Low-E Coating glass (low emissivity coated glass).

cnc@cncglass.com

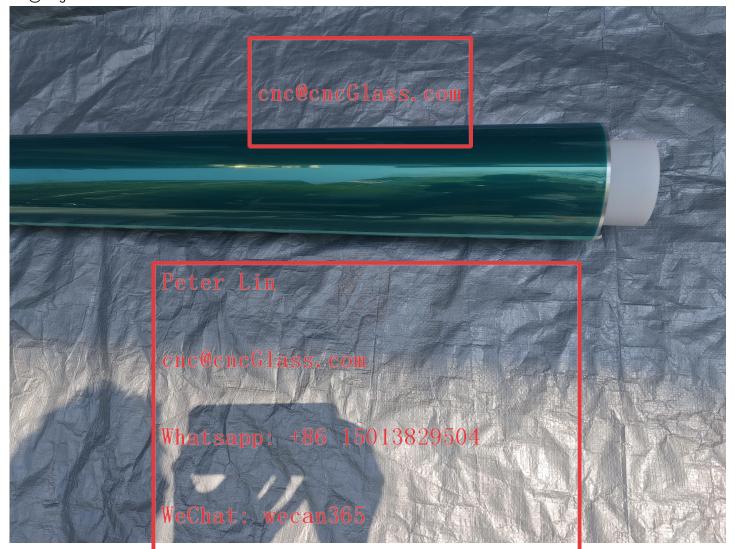

Mobile: +86 15013829504


www.cncglass.com

1280mm width 83um thickness 66 meters per roll

Thicker than normal, more adhesive strength

Physical Vapor Deposition of Coatings On Glass, used sputtering target material. The application mainly is Low-E Coating glass (low emissivity coated glass).

cnc@cncglass.com

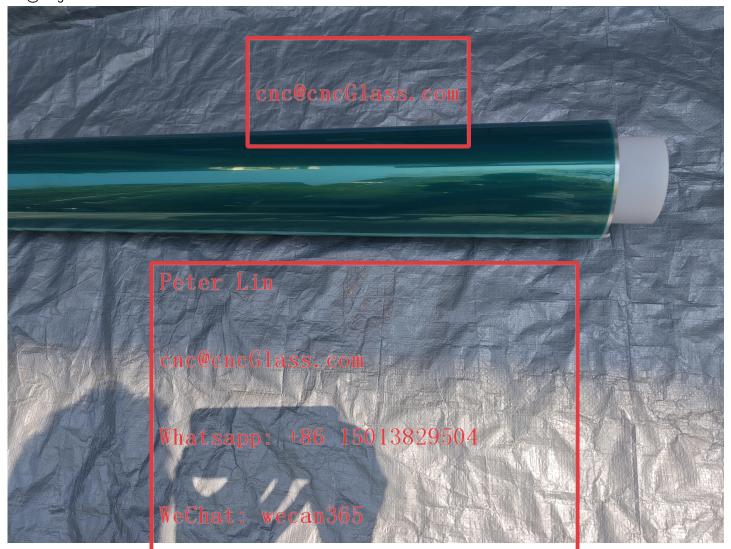

Mobile: +86 15013829504

www.cncglass.com

1280mm width 83um thickness 66 meters per roll

Thicker than normal, more adhesive strength

Physical Vapor Deposition of Coatings On Glass, used sputtering target material. The application mainly is Low-E Coating glass (low emissivity coated glass).

cnc@cncglass.com



Mobile: +86 15013829504


www.cncglass.com

1280mm width 83um thickness 66 meters per roll

Thicker than normal, more adhesive strength

Physical Vapor Deposition of Coatings On Glass, used sputtering target material. The application mainly is Low-E Coating glass (low emissivity coated glass).

cnc@cncglass.com

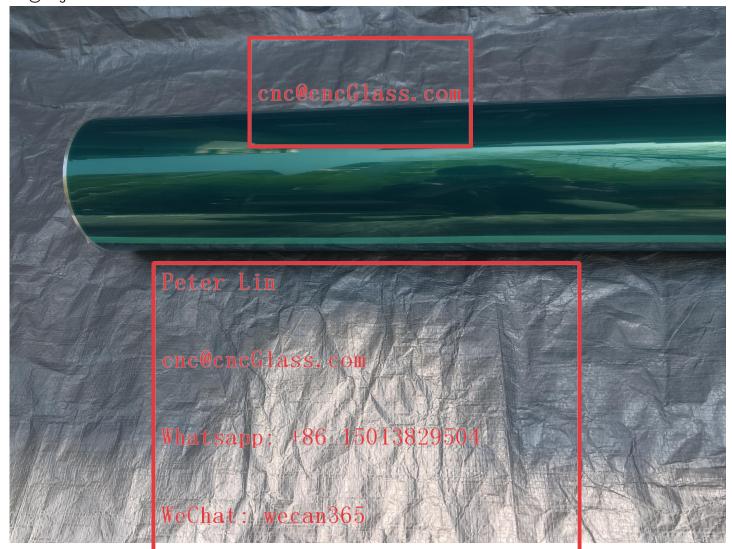

Mobile: +86 15013829504

www.cncglass.com

1280mm width 83um thickness 66 meters per roll

Thicker than normal, more adhesive strength

Physical Vapor Deposition of Coatings On Glass, used sputtering target material. The application mainly is Low-E Coating glass (low emissivity coated glass) .

cnc@cncglass.com



Mobile: +86 15013829504

www.cncglass.com

1280mm width 83um thickness 66 meters per roll

Thicker than normal, more adhesive strength

Physical Vapor Deposition of Coatings On Glass, used sputtering target material. The application mainly is Low-E Coating glass (low emissivity coated glass).

cnc@cncglass.com




Mobile: +86 15013829504

www.cncglass.com

1280mm width 83um thickness 66 meters per roll

Thicker than normal, more adhesive strength


Physical Vapor Deposition of Coatings On Glass, used sputtering target material. The application mainly is Low-E Coating glass (low emissivity coated glass).

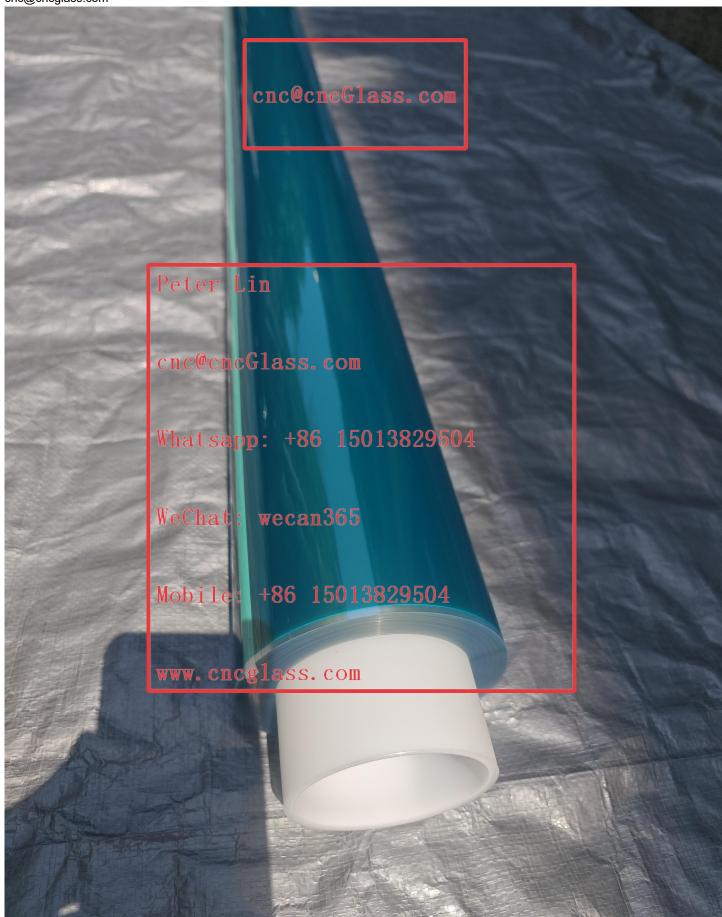

1280mm width 83um thickness 66 meters per roll

Thicker than normal, more adhesive strength


Physical Vapor Deposition of Coatings On Glass, used sputtering target material. The application mainly is Low-E Coating glass (low emissivity coated glass).

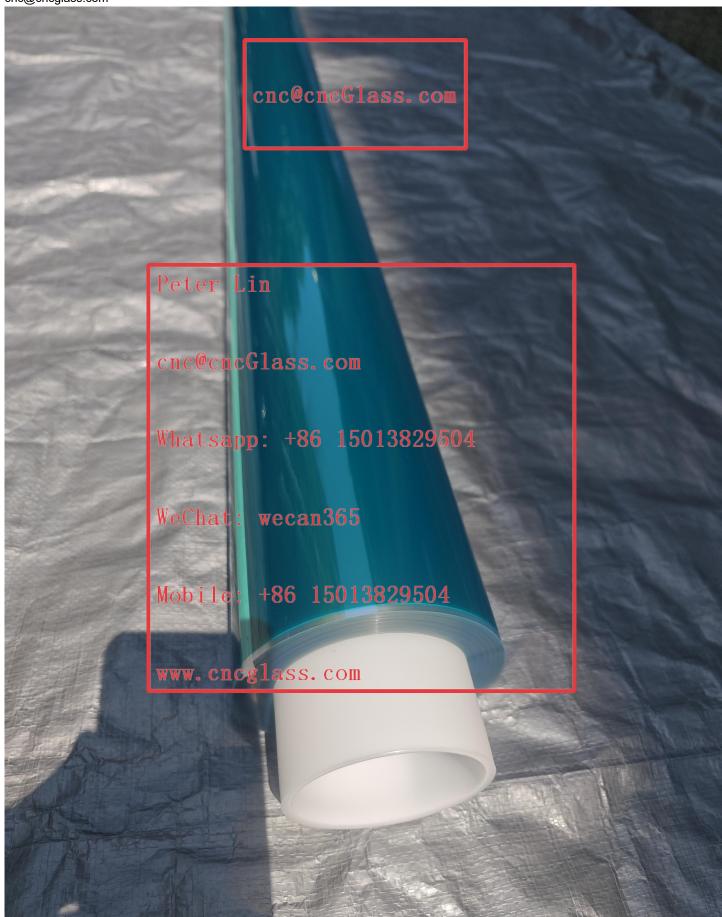

1280mm width 83um thickness 66 meters per roll

Thicker than normal, more adhesive strength


Physical Vapor Deposition of Coatings On Glass, used sputtering target material. The application mainly is Low-E Coating glass (low emissivity coated glass).

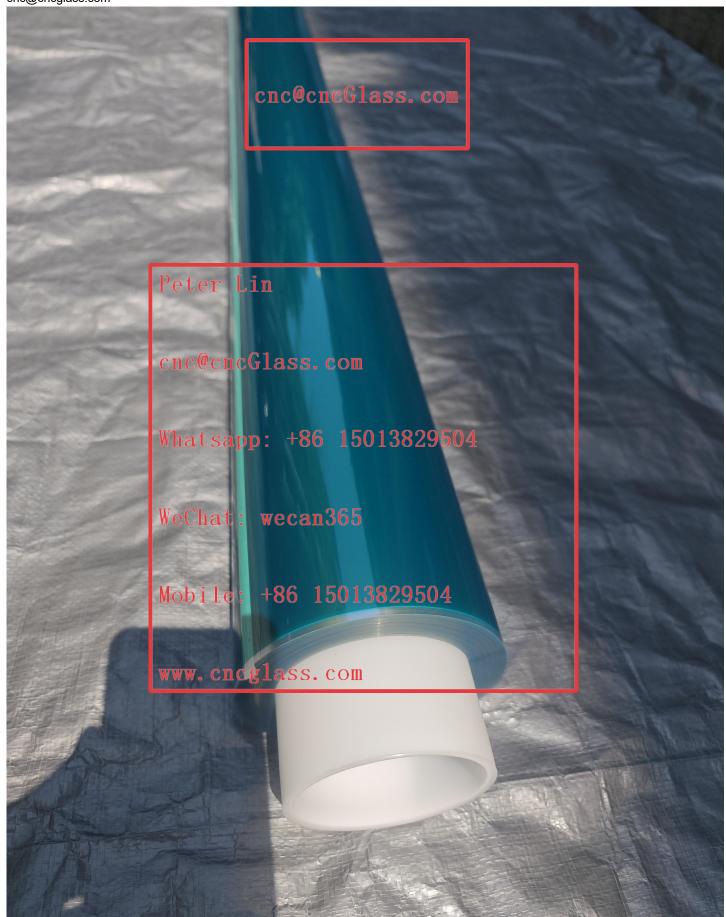

1280mm width 83um thickness 66 meters per roll

Thicker than normal, more adhesive strength

Physical Vapor Deposition of Coatings On Glass, used sputtering target material. The application mainly is Low-E Coating glass (low emissivity coated glass).

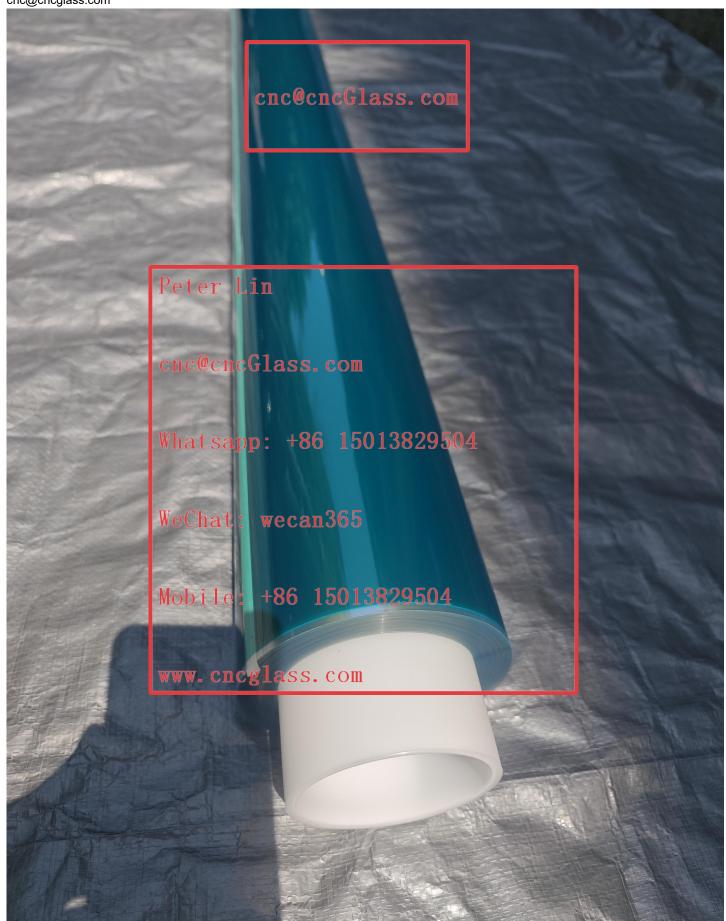

1280mm width 83um thickness 66 meters per roll

Thicker than normal, more adhesive strength

Physical Vapor Deposition of Coatings On Glass, used sputtering target material. The application mainly is Low-E Coating glass (low emissivity coated glass).



1280mm width 83um thickness 66 meters per roll

Thicker than normal, more adhesive strength

Physical Vapor Deposition of Coatings On Glass, used sputtering target material. The application mainly is Low-E Coating glass (low emissivity coated glass).

